

# Product Specification


Description	LED Amusement Lamp
Model NO	YJLED-008-SV16W

## Product Picture



Ip44 CE RoHS

## Product Application

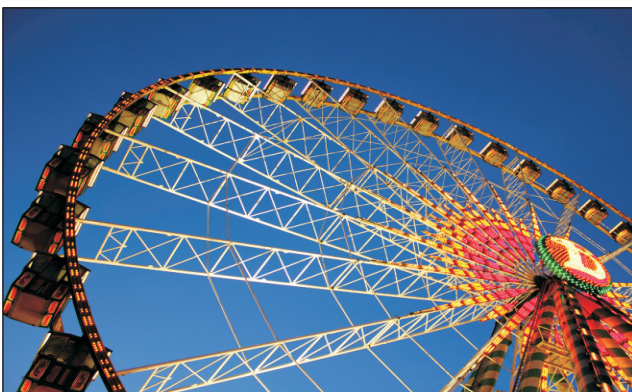


Amusement LED Lamps are widely used in the park, Theme park, amusement park and all kinds of amusement machines




**SHENZHEN AGLARE LIGHTING CO., LTD**  
Web: [www.aglare.cn/](http://www.aglare.cn/) [www.amusementlamp.com](http://www.amusementlamp.com)  
Email: [aglare@aglare.cn](mailto:aglare@aglare.cn)  
Tel: +86-75588868631


## Product Structure

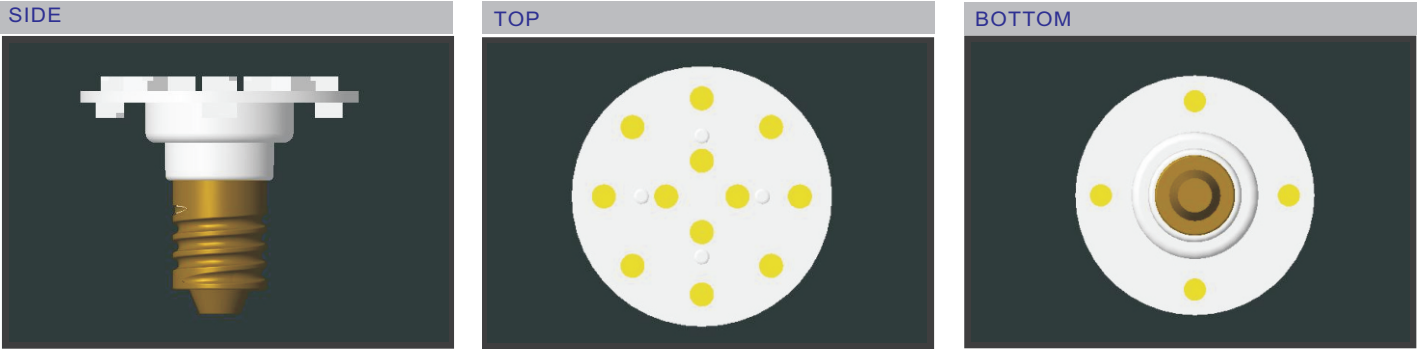

### Product Material

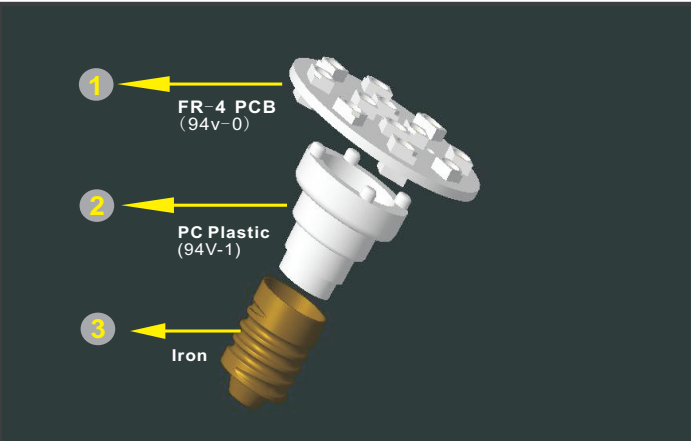

### Product size

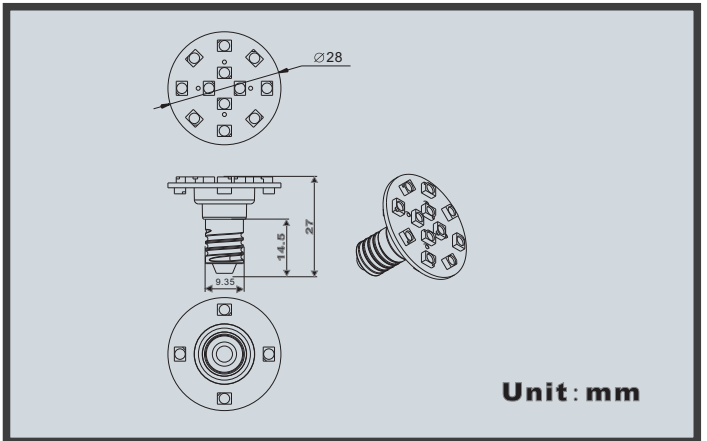


## Product Parameters


Part No.	Voltage	Color	Watts	LEDs	IP	Beam angle	Weight
YJLED-008-SV16W	AC60V		max0.8W	16pcs 3528	Ip44	120°	6.2g

R: 625-630nm G: 520-525nm B: 465-470nm Y: 585-595nm O: 600-605nm P: 390-410nm


## Product Installation

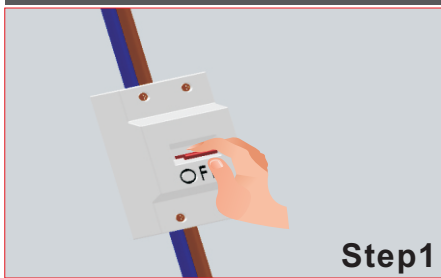


Turn off the power

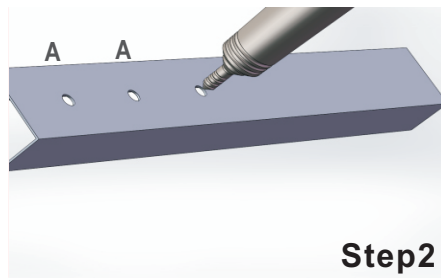


Drill hole ( $\varnothing=16\text{mm}\sim 18\text{mm}$ )  
(A to A=100mm~200mm)

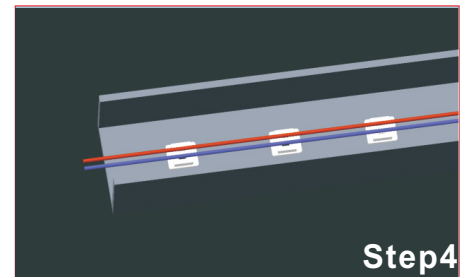


Through the lamp into the hole  
According to the order of 1-16

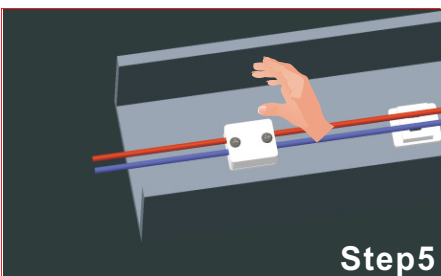

Use screws to fix the base .

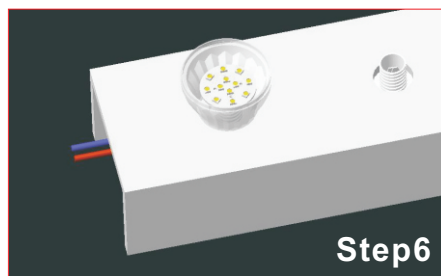

The lamp housing and lamp are  
installed into E10 lampholder.

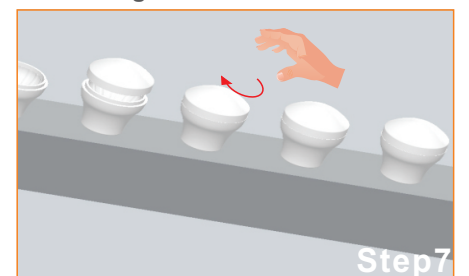

Install the upper cover.




**SHENZHEN AGLARE LIGHTING CO., LTD**  
 Web: [www.aglare.cn/](http://www.aglare.cn/) [www.amusementlamp.com](http://www.amusementlamp.com)  
 Email: [aglare@aglare.cn](mailto:aglare@aglare.cn)  
 Tel: +86-75588868631

## Product Wiring Diagram


### Mode1

AC60V Input

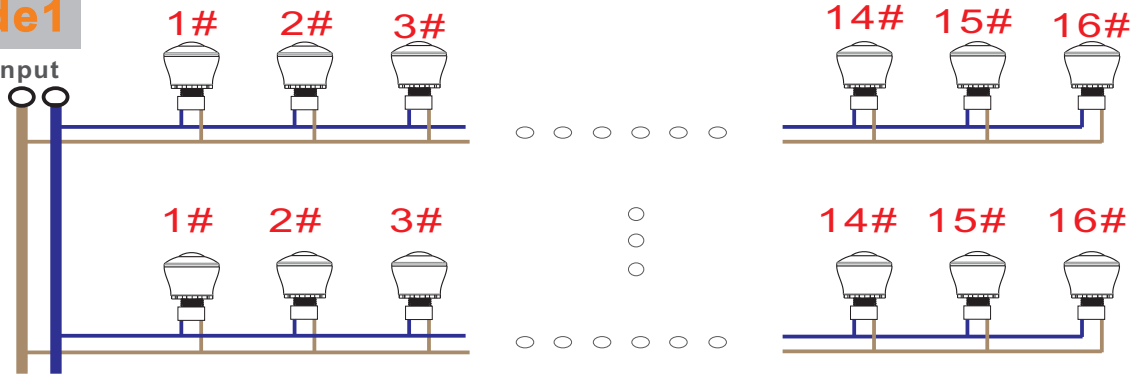

### Mode1


AC60V Input

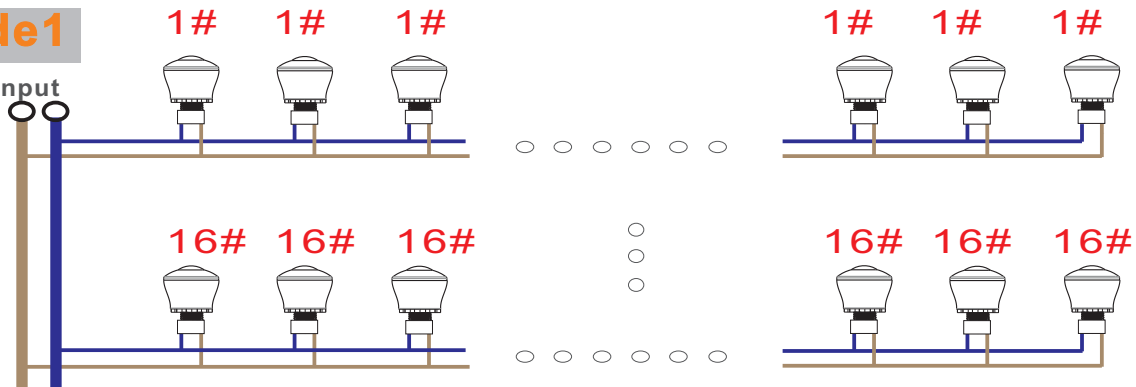

## NOTE:

- 1 The power of the lamp is max0.8W;input voltageAC60V
- 2 The main wire is recommended for each square MM maximum 10A current
- 3 Non overload use

## Product Package

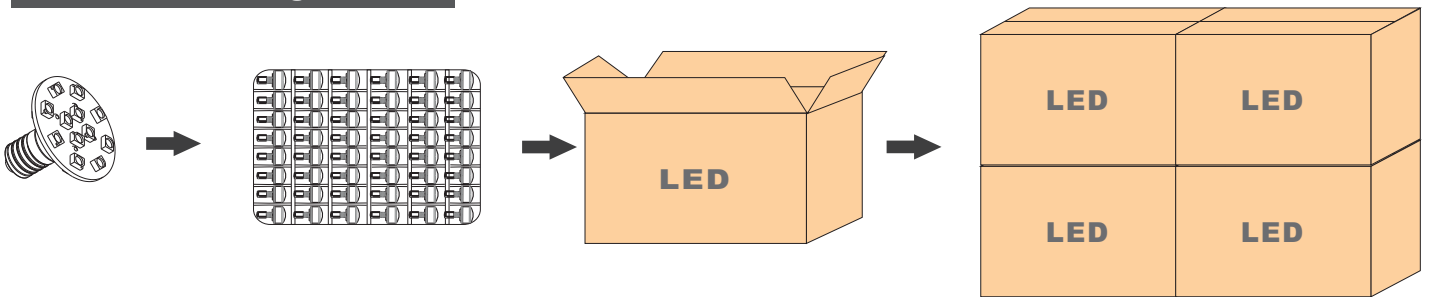

WEIGHT/PCS	Blister Size	G. W	PCS/CARTON	CARTON SIZE
6.2g	60*28.8*7cm	13.4KG	1003	61*36*38cm

### Instructions:

K=K Material Carton  
PVC blister box

## Caution

### Please read the specification before used:

Working temperature range  $-25^{\circ}\text{C}$ - $45^{\circ}\text{C}$

Working voltage range less than+ $_{-}10\%$

Please turn off the power before installation



**SHENZHEN AGLARE LIGHTING CO., LTD**

Web: [www.aglare.cn/](http://www.aglare.cn/) [www.amusementlamp.com](http://www.amusementlamp.com)

Email: [aglare@aglare.cn](mailto:aglare@aglare.cn)

Tel: +86-75588868631