

# Product Specification

Description	LED Amusement Lamp
Model NO	YJLED-035-SV16W

## Product Picture



IP65 CE



## Product Application




Amusement LED Lamps are widely used in the park, Theme park, amusement park and all kinds of amusement machines




**SHENZHEN AGLARE LIGHTING CO., LTD**  
Web: [www.aglare.cn](http://www.aglare.cn) / [www.amusementlamp.com](http://www.amusementlamp.com)  
Email: [aglare@aglare.cn](mailto:aglare@aglare.cn)  
Tel: +86-75588868631


## Product Structure

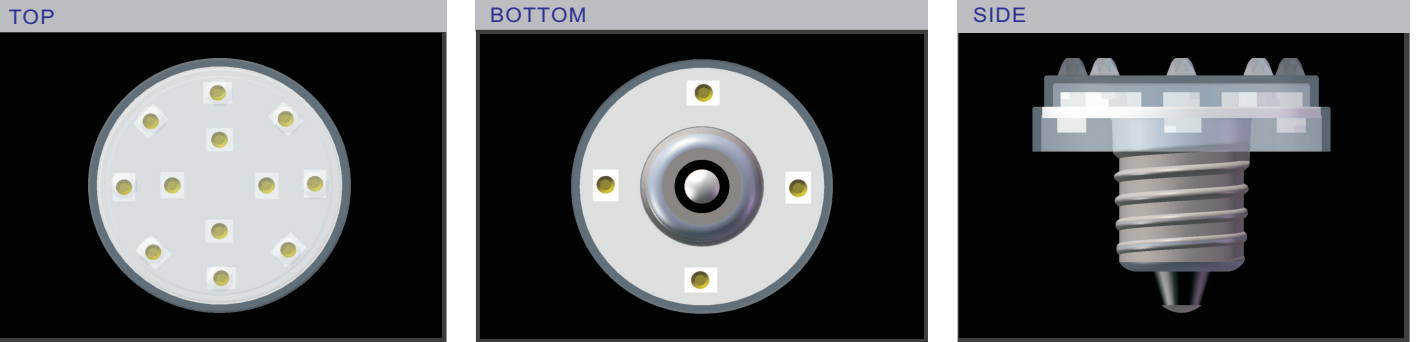

## Product Material

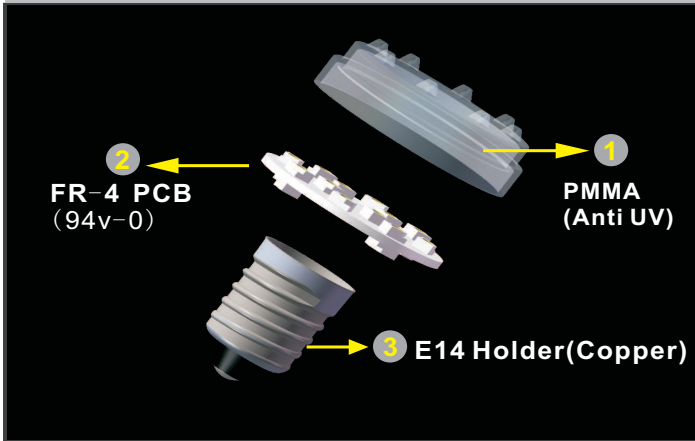

## Product size

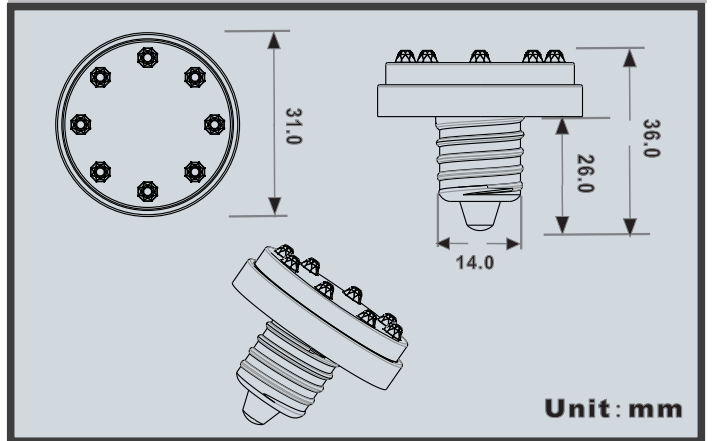


## Product Parameters

Part No.	Voltage	Color	Watts	LEDs	IP	Beam angle	Base type
YJLED-035-SV16W	AC24V	R Y O	0.85W	16pcs (SMD3528)	Ip65	240°	E14
		G B P WW W CW	0.85W				
	AC60V	R Y O	1.1W				
		G B P WW W CW	1.1W				
	AC120V	R Y O	1.0W				
		G B P WW W CW	1.0W				
	AC240V	R Y O	1.2W				
		G B P WW W CW	1.2W				

WW:2000-3500k W:8000-9000k CW:>14000k

R:625-630nm G:520-525nm B:465-470nm Y:585-595nm O:600-605nm P:390-410nm

## Product Installation

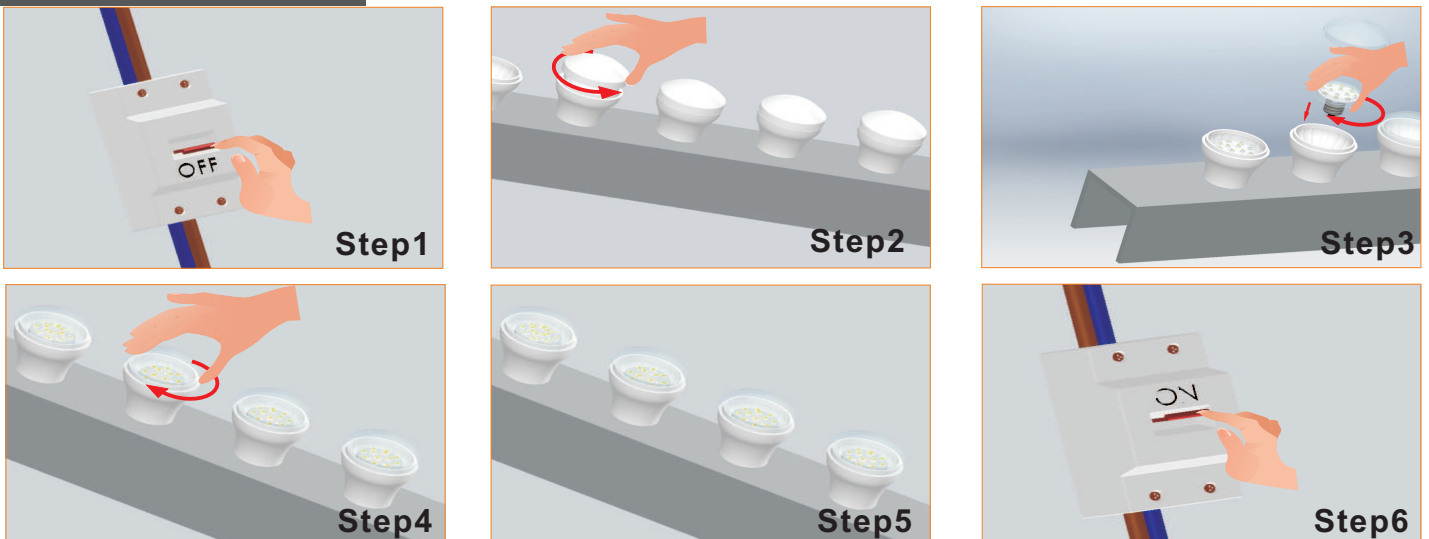

**SHENZHEN AGLARE LIGHTING CO., LTD**


Web: [www.aglare.cn/](http://www.aglare.cn/) [www.amusementlamp.com](http://www.amusementlamp.com)

Email: [aglare@aglare.cn](mailto:aglare@aglare.cn)

Tel: +86-75588868631

## Product Wiring Diagram


### AC24V Lamp

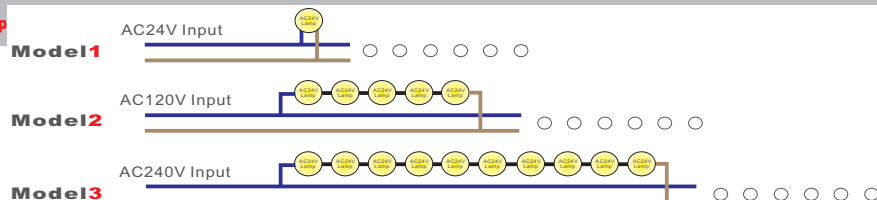

#### Note :

- 1 Lamp connected to ac24v
- 5 Lamps in series connected to ac120v
- 10 Lamps in series connected to ac240v


### AC60V Lamp

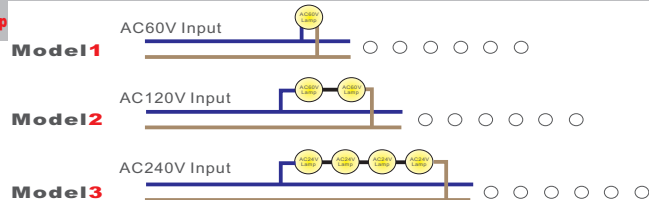

#### Note :

- 1 Lamp connected to ac60v
- 2 Lamps in series connected to ac120v
- 4 Lamps in series connected to ac240v

### AC120V Lamp

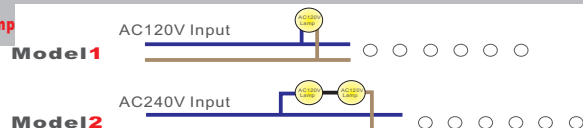

#### Note :

- 1 Lamp connected to ac120v
- 2 Lamps in series connected to ac240v


### AC240V Lamp



#### Note :

- 1 Lamp connected to ac240v

## Product Package

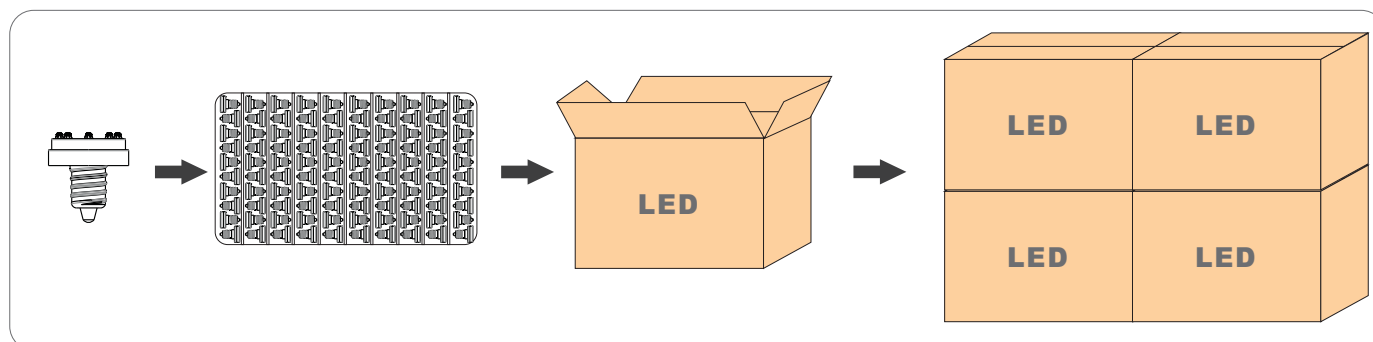

WEIGHT/PCS	N. W	G. W	PCS/CARTON	CARTON SIZE
7g	9.8KG	10.5KG	1400	60*30*35cm

#### Instructions :

- K=K Material Carton
- PVC blister box
- 10 layer each carton
- 140pcs each layer

## Caution

### Please read the specification before used:

Working temperature range  $-25^{\circ}\text{C}-45^{\circ}\text{C}$

Working voltage range less than  $+_{-}10\%$

Please turn off the power before installation



**SHENZHEN AGLARE LIGHTING CO., LTD**

Web: [www.aglare.cn/](http://www.aglare.cn/) [www.amusementlamp.com](http://www.amusementlamp.com)

Email: [aglarel@aglarel.cn](mailto:aglarel@aglarel.cn)

Tel: +86-75588868631